

DAS USA


FEATURES

- ✓ Filters manufactured from polyester resin and fiber glass.
- ✓ Excellent finish
- ✓ Fitted with manometer and manual water and air drain
- ✓ Maximum temperature: 50°C
- ✓ **Maximum pressure: 5 or 7 bar**
- ✓ Internal piping PN-16
- ✓ Collector arms injected in Polypropylene+FV

OPTIONAL

- ✓ Internal vinylester coating.
- ✓ **Internal coating for drinking water.**

Code (5 bar)	43417?	43418?	43419?	60137?
Code (7 bar)	43420?	43421?	43422?	60138?
Model (inch)	19.68	25.59	31.5	35.4
Connections (inch)	1 ½"	1 ½"	2"	2 ½"
Filtering velocity (m3/h/m2)	50			
Flow (m³/h)	10	17	25	32
Maximum pressure (bar)	5/7			
Sand (0,4-0,8mm) (lb)	287	562	1003	1212
H (inch)	38.19	43.31	49.6	
M (inch)	20.47	21.65	24.21	24.8
N (inch)	15.55	16.73	15.15	14.17

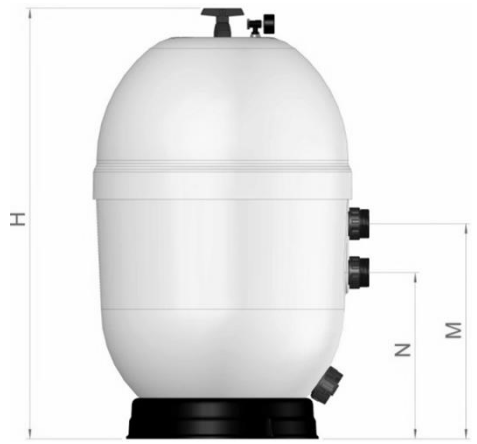

PACKAGING

Code (5 bar)	43417?	43418?	43419?	60137?
Code (7 bar)	43420?	43421?	43422?	60138?
Packaging (inch)	1.97x1.97x3.28	4.5x2.62x4.27	2.95x2.95x4.27	